

### 10AX Switches

#### Product Features:

Our full range of 10AX switches combine safety and durability while still retaining that stylish finish backed by a 25 year warranty.

- 1 & 2 way, intermediate and double pole
- Fully rated to 10 Amps for fluorescent & inductive loads
- Intermediate & 2 way switches can be wired as 1 or 2 way
- Current & voltage ratings printed on back for clarity
- Rockers available in white, black and metal finishes
- Designed & Manufactured in Great Britain

#### Plate Style:

Available in Signature (square edge), Reflect (round edge), Flatplate, Lyric (screwless low profile), Edwardian & Georgian, Aspire (white moulded) and Traditional (white moulded).



3742GBW



A2732



S3732PCWM



L3722CBT

#### Technical Data

Compliance Standard

BS EN 60669-1

Ambient operating temperature

-5 to +40°C (24 hour average not exceeding 25°C)

Rated voltage

250V AC

Maximum installation Altitude

2000 metres

Rated current

10AX

IP Rating

IP2X

Rated frequency

50 Hz

Fixing screws

2 x 3.5mm (M3.5)

Switch contact gap

3mm minimum

Operational testing at 10A

> 40,000

Terminal capacity

4 x 1.0mm<sup>2</sup>


3 x 1.5mm<sup>2</sup>

2 x 2.5mm<sup>2</sup>

Plate Style	Dimensions (mm)				
	W1	W2	H	D1	D2
Aspire	85	145	85	9.5	10
Traditional	85	145	85	9.5	10
Georgian	85.5	146	85.5	10	9
Edwardian	85.5	146	85.5	8	11
Flatplate	85	145	85	1.6	17.8
Reflect	87	147	87	9	9.8
Signature	88	146	88*	7.7	11
Lyric	86	146	86	5.5	13.3

\* For Signature Double Plate H = 86.5

\*\* Flatplate, Lyric 25mm min depth wall box, others 16mm

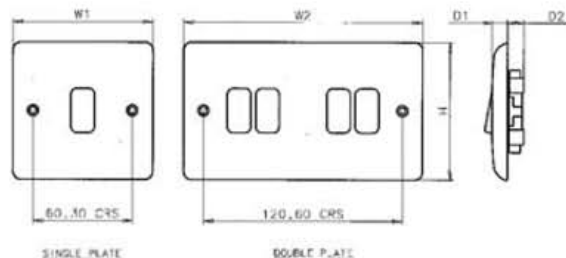

#### One Way Switching

#### Two Way Switching

#### Intermediate Switching

