




Technical Specification

PRF4900 - 2G 13A socket switched DP RCD 30mA pass

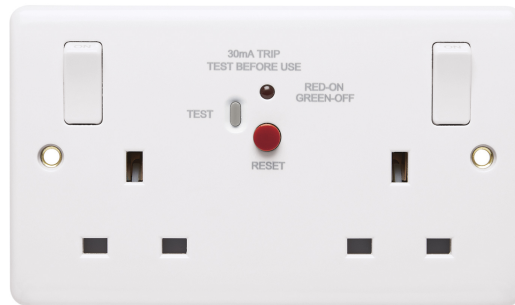

General

GTIN-13 / EAN: 5056009586255

Colour: white

Width mm: 146.00

Height mm: 86.00

Depth mm: 7.00

Technical

Fault current protection (RCD): 30mA

Rocker finish: white

Outboard rocker: Yes

Number of socket outlets switchable: 2

Associated standards: BS 7288

Rated voltage: 220-250V

Rated current: 13A

Frequency: 50-60Hz

Min. switch contact gap: 3 mm

Ambient operating temperature:

-5 to 40°C (24hour average not exceeding 25°C)

Degree of protection: IP2X

Terminal capacity: 3 x 2.5mm 2 x 4.0mm 2 x 6.0mm

Face plate material: thermoset

Minimum wall box depth: 35

Nature of supply: AC

Rated fault current: 30mA