




Technical Specification

PRF5356 - 2G 13A socket switched USB A+C 5V/3.1A

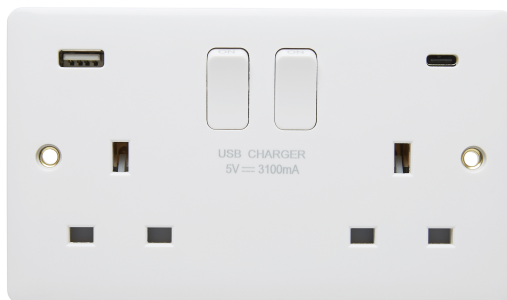

General

GTIN-13 / EAN: 5056009586651

Colour: White

Width mm: 146.00

Height mm: 86.00

Depth mm: 7.00

Technical

Face plate finish: moulded

Rocker finish: white

Number of socket outlets switchable: 2

Associated standards: BS 1363

Rated voltage: 220-250V

Output voltage: 5v

Rated current: 13A

Max. output current: 3100mA

Frequency: 50-60Hz

Min. switch contact gap: 3 mm

Ambient operating temperature:

-5 to 40°C (24hour average not exceeding 25°C)

Degree of protection: IP2X

With built-in USB power supply: Yes

Terminal capacity: 3 x 2.5mm 3 x 4.0mm 2 x 6.0mm

Face plate material: thermoset

Minimum wall box depth: 35

Nature of supply: AC