
Technical Specification

CON4900BSWM - 2 Gang 13A Latching RCD Socket DP

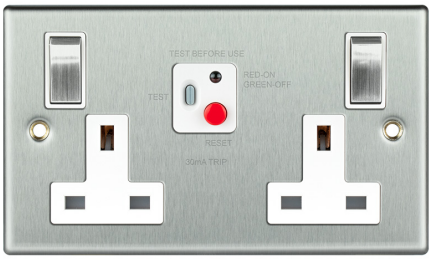

General

GTIN-13 / EAN: 5056009587894
Width mm: 145.00
Height mm: 85.00
Depth mm: 6.00

Technical

Switched poles: 2
Insert colour: white
Fault current protection (RCD): 30mA
Face plate finish: brushed steel
Rocker finish: brushed steel
Number of rockers: 2
Number of outlets: 2
Outboard rocker: yes
Number of socket outlets switchable: 2
Associated standards: BS 7288
Rated voltage: 220-250V
Rated current: 13A
Frequency: 50-60Hz
Min. switch contact gap: 3 mm
Ambient operating temperature:
-5 to 40°C (24hour average not exceeding 25°C)
Degree of protection: IP2X
Terminal capacity: 3 x 2.5mm 3 x 4.0mm 2 x 6.0mm
Face plate material: high grade stainless steel
Surface protection: lacquered
Minimum wall box depth: 35
Nature of supply: AC
Rated fault current: 30mA