Technical Specification

T2S4031KIT - T2 40kA Compact Surge Arrestor Kit

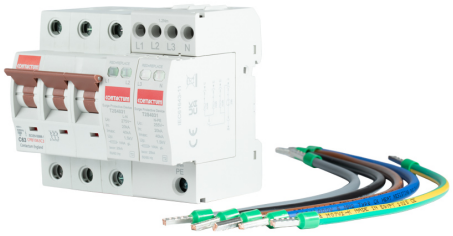

General

Box quantity: 1

Technical

ABC indicator: A
Associated standards: IEC 61643-11
Rated voltage: 220-415V
Frequency: 50-60hz
Ambient operating temperature:
-5 to 40°C (24hour average not exceeding 25°C)
Degree of protection: IP2X
Width in number of modular spacings: 2
Nature of supply: AC
Mounting method: DIN Rail