

# CONTACTUM



Dustproof



Waterproof

## Weatherproof

The industry recognised Weatherproof range has been specifically designed for use outdoors and installations where there is the likelihood of high exposure to either dust or water.

Secure solutions are possible with the use of a padlock.

Established in 1936, Contactum is a proud British brand with a distinguished heritage in the electrical industry. For nearly a century, we have been a trusted name in the supply of wiring accessories, circuit protection devices, and control products across residential, commercial, and industrial sectors.

Our reputation has been built on a foundation of quality, safety, and a design-led approach, with a focus on delivering products that meet the unique demands of the UK market.



To support our commitment to excellence, Contactum operates an ISO Integrated Management System, covering quality (ISO 9001), environmental (ISO 14001), and occupational health & safety (ISO 45001) standards. This ensures that every aspect of our operations – from product development to customer service – is underpinned by internationally recognised best practices.

Further reinforcing our dedication to sustainability and corporate responsibility, Contactum has recently been awarded a medal-level rating by EcoVadis, a leading global assessment platform for environmental, social, and ethical performance.

## alfanar

As part of the alfanar group, Contactum benefits from the backing of a global leader in electrical manufacturing, energy, and infrastructure. Headquartered in Riyadh, Saudi Arabia, alfanar brings world-class scale, engineering excellence, and advanced production capabilities to the partnership.

A large proportion of Contactum's product offering is manufactured at alfanar Industrial City – a cutting-edge 700,000 square metre facility in Riyadh. This ISO-certified complex is equipped with automated production lines, quality testing laboratories, and R&D centres, staffed by skilled professionals committed to delivering consistent quality and innovation across all markets.

Offering the latest solution-led wiring accessories to award-winning consumer units and commercial switchgear, Contactum delivers reliable, specification-grade electrical solutions designed to meet the evolving needs of electricians, contractors, wholesalers, and specifiers.


We pride ourselves on combining performance, compliance, and visual appeal across our ranges, supported by robust technical expertise and responsive customer service.



This achievement highlights our continuous efforts to operate transparently, reduce environmental impact, and promote responsible business practices throughout our supply chain.



By combining the local insight and agility of a UK-based brand with the scale, resources, and innovation of a global manufacturing group, Contactum remains uniquely positioned to serve the needs of the modern electrical market. Whether supporting new build developments, refurbishment projects, or infrastructure upgrades, Contactum continues to deliver dependable solutions trusted by professionals across the UK and beyond.

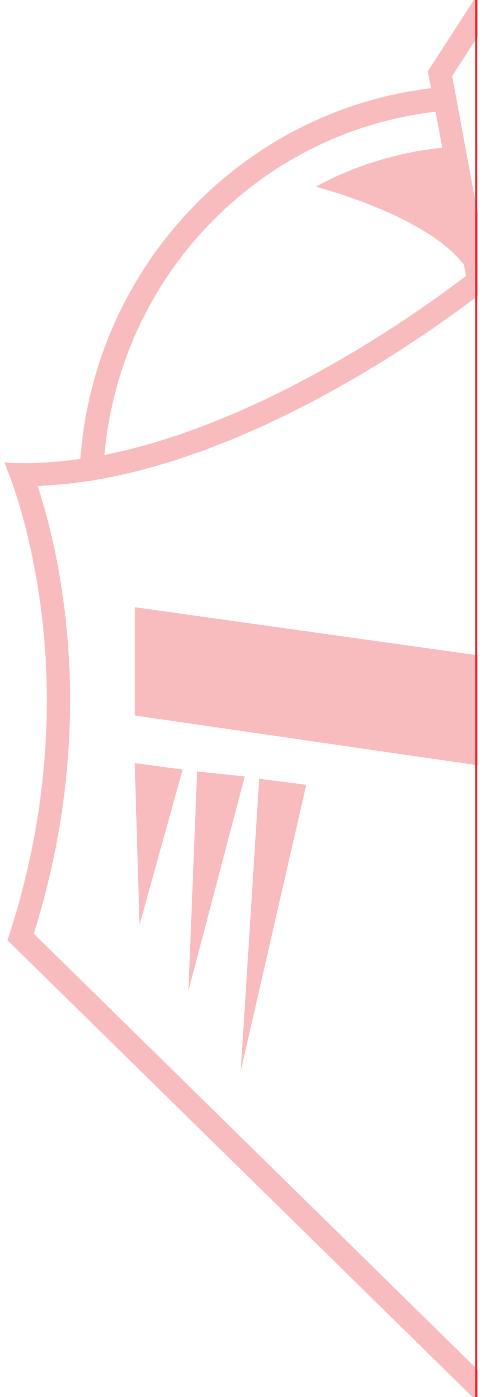

## Contents

---

Features	4
Surface Switches	5
Flush Switches	6
Sockets, FCUs and Empty Enclosures	7

---

# Features



## Features

- + IP55/ IP66 Rated, complies with BS EN 60529
- + 20A Switching, complies with BS EN 60669-1
- + Robust thermoplastic enclosure
- + Lockable cover for added safety
- + Neon indicator for clear on/off status
- + Screw caps
- + Easy wall-mounted installation
- + Ideal for lighting, pumps, and outdoor equipment



Dustproof



Waterproof

The Weatherproof products comprise a robust thermoplastic enclosure and are intended for interior and exterior use wherever water and dust proofing are required.

The products need to be fitted with waterproof cables or conduit entries to maintain their IP rating once installed.

It offers an easy and safe wall mounting control for equipment such as lighting, bell, garden water pumps etc.



# Surface Switches

## Surface Single Pole Switches

**IP66**  
20A rating



Product:	Product Code:	Product Code:
Int Switch	SRA4810	SRA4823
2 way switch	SRA4812	SRA4822
Press Switch	SRA4820	
Bell Push Switch	SRA4836	

Dimensions	1 Gang	2 Gang
Height (H) mm	96	96
Width (W) mm	96	96
Depth (D) mm	74	74

## Surface Double Pole Switches

**IP66**  
20A rating



Product:	Product Code:	Product Code:
DP Switch	SRA4814	SRA4824

Dimensions	1 Gang	2 Gang
Height (H) mm	96	96
Width (W) mm	96	96
Depth (D) mm	74	74

# Flush Switches

## Flush Single Pole Switches

**IP55**  
20A rating



Product:	Product Code:	Product Code:
Int switch	SRA4810F	SRA4823F
2 Way switch	SRA4812F	SRA4822F
Press switch	SRA4820F	
Bell push switch	SRA4836F	

Dimensions	1 Gang	2 Gang
Height (H) mm	96	96
Width (W) mm	96	96
Depth (D) mm	39	39

## Flush Double Pole Switches

**IP55**  
20A rating



Product:	Product Code:	Product Code:
DP switch	SRA4814F	SRA4824F

Dimensions	1 Gang	2 Gang
Height (H) mm	96	96
Width (W) mm	96	96
Depth (D) mm	39	39

# Sockets, FCUs and Empty Enclosures

## Sockets and FCUs

IP66



Product:	Product Code:	Product Code:
Switched Socket	SRA4346	SRA4356
Fuse Connection Unit	SRA4366	
RCD Latching Socket		SRA4900

Dimensions	1 Gang	2 Gang
Height (H) mm	155	155
Width (W) mm	114	174
Depth (D) mm	86	86

## Surface Mounted Empty Enclosures

IP66



Product:	Product Code:	Product Code:
Surface Mounted	SRA4011*	SRA4022*

\*Compatible with Contactum Profile+ range

Dimensions	1 Gang	2 Gang
Height (H) mm	155	155
Width (W) mm	114	174
Depth (D) mm	86	86

## Flush Mounted Empty Enclosures

IP55



Product:	Product Code:	Product Code:
Flush Mounted	SRA4011F*	SRA4022F*

\*Compatible with Contactum Profile+ range

Dimensions	1 Gang	2 Gang
Height (H) mm	155	155
Width (W) mm	117	177
Depth (D) mm	51	51

# Weatherproof

---

## CONTACTUM

[www.contactum.co.uk](http://www.contactum.co.uk)

020 8208 7419

[sales@contactum.co.uk](mailto:sales@contactum.co.uk)



@ContactumLtd



Contactum Ltd




@ContactumLtd



Contactum Ltd



@ContactumLtd



Scan me for more  
info on our website



IP66WB - RevLev04



5 056009 598968 >